



Counterframe system for a single pocket door without the need for architraves.



Finished wall thickness 100 / 125 / 150

When you don't want to see architraves and jambs, just clean lines of wall / door / wall

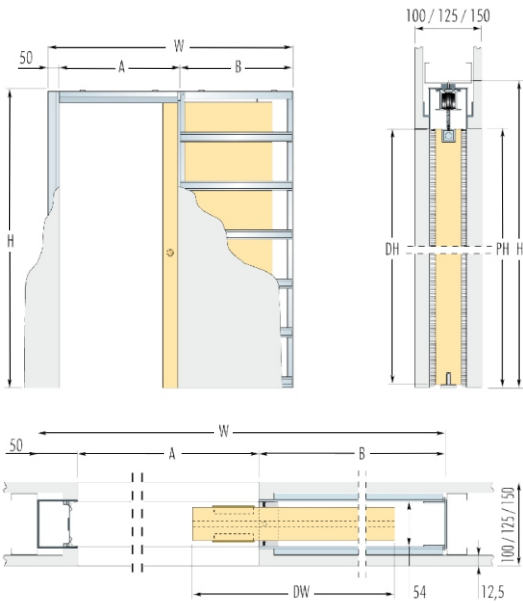

N.B. Non standard sizes on request

P.S. The top of the door should be routed as indicated.



AVAILABLE ACCESSORIES

- Door Furniture

FURTHER INFORMATION

0113 245 9559
info@pocketdoors.co.uk
www.pocketdoorshop.co.uk

FRAMES FOR SINGLE DOORS				DOOR PANEL UK		NOTES
Clearance A x PH	B	Overall Dimension W x H	Finished Wall	Standard		<p>Suitable for door thickness 35 to 40mm Max door weight 80kg</p> <p>When fitting flush pull handles we recommend the track stop to be positioned so the door protrudes from the pocket to avoid risk to fingers. Should the door be adjusted to retract fully into the pocket we do not accept any liability.</p> <p>Doors, plasterboard and plaster not supplied</p>
				DW	DH	
600 x 2048	735	1385 x 2108	100 / 125 / 150	626	2040	
700 x 2048	835	1585 x 2108	100 / 125 / 150	726	2040	
800 x 2048	935	1785 x 2108	100 / 125 / 150	826	2040	
900 x 2048	1035	1985 x 2108	100 / 125 / 150	926	2040	
1000 x 2048	1135	2185 x 2108	100 / 125 / 150	1026	2040	
584 x 1989	735	1369 x 2049	100 / 125 / 150	2ft. 0in. x 6ft. 6in. (610 x 1981mm)		
660 x 1989	835	1545 x 2049	100 / 125 / 150	2ft. 3in. x 6ft. 6in. (686 x 1981mm)		
736 x 1989	935	1721 x 2049	100 / 125 / 150	2ft. 6in. x 6ft. 6in. (762 x 1981mm)		
812 x 1989	935	1797 x 2049	100 / 125 / 150	2ft. 9in. x 6ft. 6in. (838 x 1981mm)		
888 x 1989	1035	1973 x 2049	100 / 125 / 150	3ft. 0in. x 6ft. 6in. (914 x 1981mm)		